Sisal for Square or Round Bales

Brazilian

Our Brazilian line represents premium-quality sisal twines by COSIBRA, Brazil's most experienced twine manufacturer.



Brazil's extra-long and strong fibers ensure uniform knotless twines for both square and round bales.

Features include:

- Extra-long fibers for consistent trouble-free baling, uniformity, and true length
- High tensile and knot strength
- Specially treated to resist rodents and insects
- Biodegradable

SPECIFICATIONS

Square Bales

10,000 ft. approx. 325# tensile 9,000 ft. approx. 350# tensile 7,200 ft. approx. 425# tensile

Round Bales

16,000 ft. approx. 180# tensile

Silage Twine (Untreated)

16,000 ft. approx. 180# tensile

Wrap for Round Bales

Silage Film For Square or Round bales

Manufactured using only quality virgin materials, these products contain special ultraviolet inhibitors to prolong the life of wrapped bales.

SPECIFICATIONS

Silage Film

20 in. wide x 6,000 ft. 1.0 mil (25 mic.) - White 30 in. wide x 5,000 ft. 1.0 mil (25 mic.) - White *Black is available upon request.

Silage Film End Caps

93" x 72" (for 4 1/2' to 5' diameter bales) 110" x 72" (for 5 1/2' to 6' diameter bales 20 caps/roll

Silage Film Repair Tape

7.5 mil polyethylene tape 3" x 60 yds. 16 rolls/carton



Protect Your Investment

You spend a great deal of time and energy in the preparation of your crop and so you have a big investment to protect.

Choosing the right crop packaging product may be the most critical decision you make in the baling process and it is one of the most important. By selecting a quality net or twine that suits your specific needs, you are wisely protecting your investment by eliminating the possibility of down time and crop loss.

Remember, our business is the manufacturing and distribution of premium quality products for hay and straw packaging. You can rely on our expertise, reputation and knowledge that we know your business needs and work to meet them.



Distributor:




Tama USA Inc.

P.O. Box 506, Dubuque IA 52004-0506 Tel: (563) 583-3035 Fax: (563) 583-3531 Toll Free: 1-800-225-8946 E-mail: info@tama-usa.net

Website: www.tama-usa.com

B7 10/2020

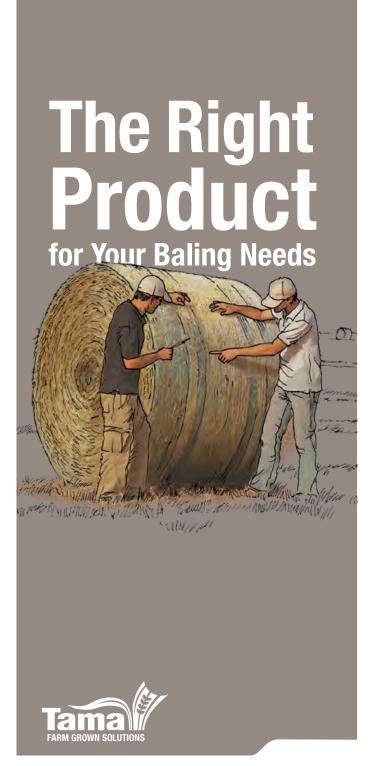

Netwrap for Round Bales

TamaNet[™] with TamaTec+[™]

The Next Generation in Bale Wrap Technology

- Reliable and consistent. For a trouble-free baling experience - every time.
- Edge to Edge™ technology for perfect bale coverage.
- Zebra System™. A clear Left-Right indicator for easy and correct loading of the roll into the baler every time. Plus, at feeding time, user can quickly see which direction to unroll the bale.
- Red End Warning. Indicates to the operator that the end of the roll is approaching. The red stripe marks the last 240 ft.
- Guaranteed Length. Every roll contains at least the guaranteed stated length, not a "plus-or-minus"
- Carry Handles. Easier and safer handling.
- Unique ID Number. Enables tracing of full production details.

SPECIFICATIONS

64" x 7,000' 48" x 9,840' 64" x 9,000' 48" x 12,500' 67" x 7,000' 51" x 9,840' 67" x 8,500' 51" x 11,500'



PP Twine for Square and Round Bales

Orangeline[™] & Balebind™

A premium grade fibrillated split-film twine





SPECIFICATIONS

Large Square Bales

4,000 ft. - BT 350# knot strength 4,000 ft. - BT 440# knot strength

4,000 ft. - BT 500# knot strength

4,000 ft. - BT 550# knot strength

Small Square Bales

10,000 ft. - BT 190# knot strength 9,600 ft. - BT 170# knot strength 9,000 ft. - BT 130# knot strength 7,200 ft. - BT 170# knot strength 6,500 ft. - BT 240# knot strength

Round Bales

20,000 ft. 110# – tensile strength 20,000 ft. 130# - tensile strength 20,000 ft. 150# – tensile strength

Monofilament Twines

20,000 ft. 110# - tensile strength 20,000 ft. 140# - tensile strength

Other specifications available. Please call for more information.

Degradable Twine for Round Bales

ClearField™

Degradable Polypropylene for Round Bales



SPECIFICATIONS

Round Bales

20,000 ft., 110# - Tensile strength

Polypropylene Twine for Square Bales

TamaTwine+™

The twine for the professional user. Reduces your cost and increases your baler's potential!

Features include:

- Guaranteed length.
- Unrivaled knotting performance.
- Fully OEM validated.
- Special UV light inhibitors to withstand intense exposure over long periods.
- Uniform spool shape and consistent yarn to ensure trouble-free running in the baler.



Max Height 14.5" Max Diameter 12















